

# MTL5018AC SWITCH/ PROXIMITY DETECTOR INTERFACE

two-channel, with line fault detection  
and phase reversal

The MTL5018ac enables two safe-area loads to be controlled by two switches or proximity detectors located in a hazardous area. Two relay outputs are provided. Independent phase reversal control allows an alarm condition to be signalled for either state of the sensor. A selectable line fault detect (LFD) facility detects an open or short circuit in either field circuit.

## SPECIFICATION

See also common specification

### Number of channels

One

### Location of switches

Zone 0, IIC, T4–6 hazardous area  
Div. 1, Group A hazardous location

### Safe-area output

Two relays with changeover contacts

### Hazardous-area inputs

Inputs conforming to NAMUR/DIN 19234 standards for proximity detectors

### Voltage applied to sensor

7 to 9V from  $1k\Omega \pm 10\%$

### Input/output characteristics

Normal (reverse) phase:

output energised (de-energised) if  $I_{lin} > 2.1mA$  or  $R_{in} < 2k\Omega$   
output de-energised (energised) if  $I_{lin} < 1.2mA$  or  $R_{in} > 10k\Omega$

Hysteresis:  $200\mu A$ , typical

### Line fault detection (LFD)

User-selectable via switches on the top of the unit. Line faults are indicated by an LED for each channel. A detected line fault de-energises the relay.

Open-circuit alarm on if  $I_{lin} < 100\mu A$

Open-circuit alarm off if  $I_{lin} > 250\mu A$

Short-circuit alarm on if  $R_{in} < 100\Omega$

Short-circuit alarm off if  $R_{in} > 360\Omega$

Note: Resistors must be fitted when using the LFD facility with a contact input

$500\Omega$  to  $1k\Omega$  in series with switch

$20k\Omega$  to  $25k\Omega$  in parallel with switch

### Phase reversal

Independent for each channel, user-selectable

### Relay type

Single pole, changeover contacts

Note: reactive loads must be adequately suppressed


### Relay characteristics

Response time: 10ms maximum

Contact rating: 250V ac, 2A,  $\cos\phi > 0.7$

40V dc, 2A, resistive load

## MTL5018AC

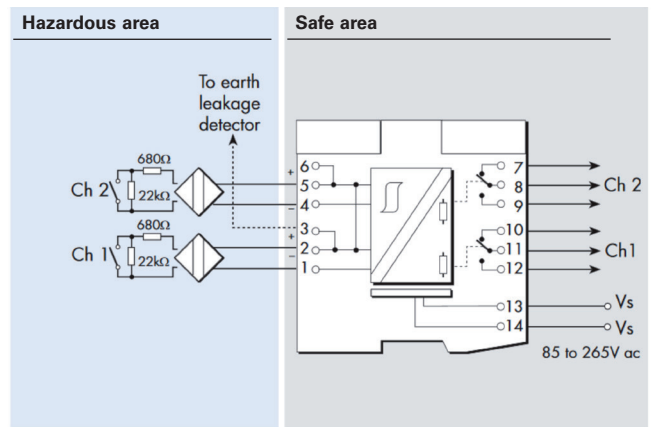

Terminal	Function
1	Input -ve (Ch 1)
2	Input +ve (Ch 1)
3	Earth leakage detection
4	Input -ve (Ch 2)
5	Input +ve (Ch 2)
6	Earth leakage detection
7	Normally-closed contact (Ch 2)
8	Common (Ch 2)
9	Normally-open contact (Ch 2)
10	Normally-closed contact (Ch 1)
11	Common (Ch 1)
12	Normally-open contact (Ch 1)
13	AC Supply
14	AC Supply

### LED indicators

Green: power indication

Yellow: two: status of each channel (on when outputs are energised)

Red: two: LFD indication for each channel (on when line fault detected)

### Maximum power dissipation

$< 2.5W$

### Isolation

250V ac or dc between power supply, hazardous-area circuits and relay outputs

### Safety description (each channel)

10.5V,  $800\Omega$ , 14mA,  $U_m = 250V$  rms or dc

### Power Supply

85 to 265V ac

45 to 65 Hz

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.